


To order see pages 4&5 for distributor details or call 0845 4082 505. Prices available on separate Spares Pricelist

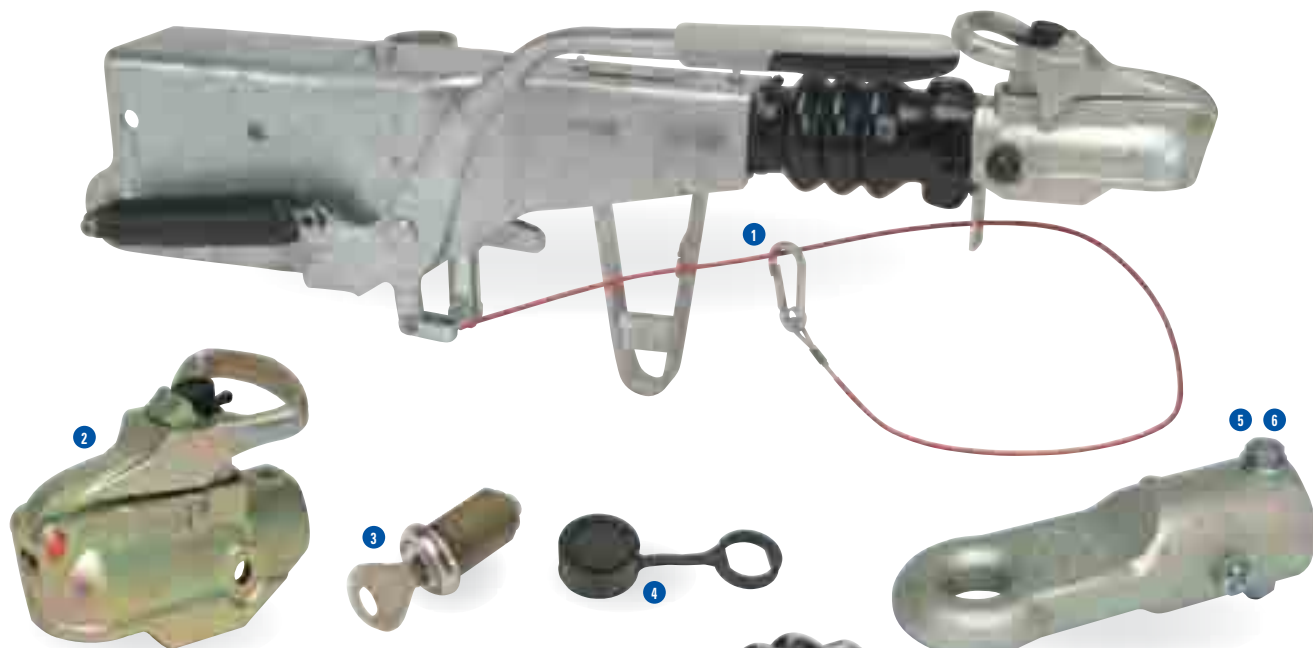

P00308 Coupling Unit KF20A. 120mm centres. Lockable pressed steel head. High rear bracket. Used on the Eurolight range EX202-2515, 3015 & 3615.

1 P00320 KRV20 Coupling Unit (Pressed Steel Body) For 100Mm Square Tube Drawbars. 1100-2000Kg GVW Hydraulically damped overrun coupling unit, incorporating energy store handbrake for use with autoreverse brakes and 50mm ball hitch. Used on the HB401 & HB403.

P00330 Coupling Unit KFG20. Weight range 1100 – 1200kg. 50mm lockable low profile coupling head. Used on the GH64 and as a replacement coupling for the KF13 (pre April 2008).

2 P00301 Coupling Head. Replacement lockable low-profile head for the KFG20 & KRV20 couplings.

P003085 Coupling Head. Replacement head for the KF20 coupling.

3 P00302 Lock insert. Replacement lock for the Avonride coupling head. Used on the Avonride head fitted to the KFG20 & KRV20 coupling units.

4 P00303 Cover Cap. Protects the Avonride coupling head lock from ingress of dust and water. Used on the Avonride head fitted to the KFG20 & KRV20 coupling units.

5 P00318C 30mm Eye Kit. Includes all mounting hardware.

6 P00333 40mm Eye Kit. Includes all mounting hardware.

7 P00369 Bellows. Replacement protective bellows.

8 P00373 Damper. Replacement hydraulic damper.

P00936 Damper Bracket. Holds one end of the damper within the body of the coupling unit.

9 P00938 Drawtube.

10 P00413 Overrun Lever. Fitted to the rear of the coupling unit, this lever creates the pull on the brake rod.

11 P00868 Spring Pack. Oil damped unit only, as fitted to later or upgraded units. Used on the KFG20 coupling unit.

P00929 Spring Pack. Oil damped spring pack unit only. Used on the KF20 & KRV20 coupling units.

12 P00869 Hand Brake Assembly. KFG low type. Used on the KFG20 coupling.

P00928 Hand Brake Assembly.

13 P00363 Clamp Handle. Jockey clamp handle.

14 P00399 Retainer Pad. Fits within the recess in the overrun unit to securely clamp the jockey wheel.

15 P00387 Breakaway Cable Spring Ring Type. It is recommended that you carry a spare breakaway cable whenever you tow.

16 P00899 Breakaway Cable Clevis Type. For more recent knott couplings having this type of cable fitted originally.



EYE MAY DIFFER FROM THE PHOTOGRAPH