

TIPPER

TT2515 / TT3017 / TT3621



BRITAIN'S LEADING
TRAILER MANUFACTURER

In Safe Hands

SPECIALISTS IN TRAILER DESIGN & ENGINEERING

For over 60 years, people have put their trust in our trailers, just ask an owner they're not difficult to find. As specialists in trailer design and engineering, we have continued to set the standard both in the UK and throughout much of Europe.

We are an independent company with one focus: to build the best products on the market. More than 30,000 people choose our trailers each year - but we're not standing still. Our dedicated investment in new technologies and materials ensures that our products continue to exceed the expectations of our customers. We know that quality, strength, value and ease of maintenance are of vital importance to you. That's why we've made them the driving force behind everything we do.





Introducing the Next Generation Tipper

Take a look at any of our trailers and you'll find that safety, flexibility and ease of use are built in. The new tipper is no exception, providing a robust and versatile solution for many industries including building, landscaping, tree surgery and agriculture.

In 2012 the models have been updated with a range of new features to make the customer's work a little easier, and to allow for even greater flexibility in how the trailer can be used.

We have evaluated every aspect of the tipper trailer's design, based on customer feedback and our long experience of manufacture.

This has led to significant improvements to the tipper, but the fundamental features of parabolic leaf spring suspension, solid beam axle and sealed-for-life taper roller bearings remain unchanged.

So what have we changed?

The new models feature a greater strength to weight ratio which has allowed us to further increase the payload of our tippers. Changes to the configuration of the chassis and body provide improved protection against accidental damage to both the tipper pump and the rear lights.

In addition to these fundamental changes we have introduced many new features to enhance usability including:-

- Improved hinged mesh sides and the addition of new hinged solid side extensions
- Lockable storage box for the tipper remote control
- Reduced gaps on drop sides
- Skid carrying capability on all of the tipper models, including the TT2515 (8' version)

The many other changes and improvements are shown on the following pages.

New Tipper Explained

A regular on building sites all over the UK and Europe, the Lfor Williams tipping trailer is the builder's perfect partner, renowned for its strength, versatility and unbeatable value. Over the past two and a half years we have developed and tested the next generation tipper, which contains a number of improved features and accessories that our customers have been asking for.

While the tipper names have changed (the TT85, TT105 and TT126 have become the TT2515, TT3017 and TT3621), the new trailers are the metric equivalent and offer the same volumetric capacity.

The TT2515 (8' x 5'), the smallest of the range, has a maximum gross weight of 2700kg with the option of a manual or electric hydraulic pump (and self contained 12v battery). The trailer comes with a strengthened aluminium floor as standard. The two larger models, the TT3017 (10' x 5'6") and TT3621 (12' x 6'6") are electrically operated tippers with a self contained 12v battery.

In the following pages, the new features are explained in detail.



TT2515



New Features and Benefits

- Greater payload
- Aluminium planked floor on all models
- Increased tipping angle
- Tipper pump now mounted under the trailer bed provides extra protection
- Hinged mesh sides
- Improved dropside design
- TT2515 (8' x 5') has provision to stow skids
- 185/70R13 wheel option available on TT3017 (10' x 5'6") and TT3621 (12' x 6'6")
- Enhanced rear light protection through improved tipping geometry
- Mesh light guard option for further protection
- Storage box for tipper control
- Double hinged tailboard
- Solid side extension kit



**NOW
AVAILABLE**
**Solid side
extension
kit**

Trailer Features

It's the attention to detail on Ifor Williams Trailers that makes our products so popular with owners. Just take a look at these standard features.



Aluminium Planked Floor



Chassis

The underside of the trailer features a galvanised steel chassis and drawbar, for long-lasting corrosion protection.

Floor

A strengthened aluminium floor is standard on all models.

Beam Axle and Leaf Spring Suspension

The Ifor Williams beam axle system increases stability and reliability whilst ensuring minimum maintenance.

Spare Wheel

A mounting bracket and spare wheel are fitted on all tipper.

Dropsides and Headboard

Strengthened steel dropsides and headboard are a standard feature on all tipping trailers. The new design minimises gaps between the dropside and the trailer.

Double Hinged Swing Tailboard

The improved design tailboard is hinged at the top and bottom for added convenience.

Storage Box

A handy lockable storage box is an ideal place to store the tipper remote control.

Electric Hydraulic Tip

TT3017 and TT3621 are electrically operated, with a self-contained 12v battery. This is an option on the TT2515. The pump is mounted under the trailer bed to provide additional protection.



Beam Axle



Spare Wheel



Dropsides



Swing Tailboard



Storage Box



Electric Hydraulic Tip





Optional Features

The addition of selected accessories allows you to further enhance your trailer and tailor it to suit your specific needs.



Loading Skids



Rear Light Guards



Ladder Rack



Lashing Point



Toolbox



Solid Side Extensions



Mesh Sides



Electric Winch

Skid Carrier

The skid carrier is an optional accessory on the tipper range.

2.4m long (8') Steel or Aluminium Loading Skids

Loading Skids can be used to permit the loading of wheeled and tracked plant equipment.

Propstand Kit

To be fitted when loading and unloading plant.

Removable Ladder Rack

A new design allows two different height settings to be used.

Rear Light Guards

Road legal rear light guards offer further protection when tipping.

Toolbox

A convenient lockable toolbox for carrying loose items.

Floor Mounted Lashing Points

Rated at 500kg, lashing points are recommended for users who carry items of plant.

Mesh Sides

A versatile accessory which now features hinged sections for added convenience.




Solid Side Extensions

A new accessory which adds extra height with filled in sides. Use instead of mesh sides for tasks which involve carrying loose or small products.

Electric Winch

Powerful and robust electric winch with corded remote control unit.

Tipper Model

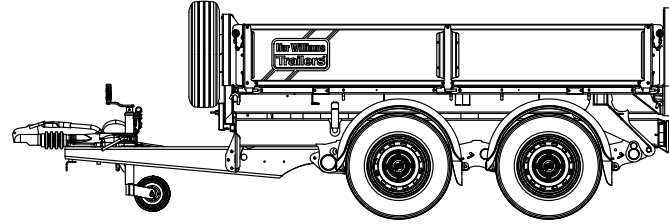

Ifor Williams Trailers Ltd
Cynwyd, Corwen,
Denbighshire LL21 0LB UK
Telephone +44 (0)1490 412527
sales@iwt.co.uk

For further information visit our
comprehensive website
www.iwt.co.uk

Prices are ex-works and are subject to delivery
charges and the VAT rate applicable at the date
of supply.

A range of optional extras are shown on
photographs throughout this brochure. Please check
the pricing table for more information.

Product design, descriptions, colours, specifications
etc. correct at time of going to press. We constantly
strive to improve our products, and from time to
time this may result in changes to our range or
to individual models. Please check that design,
description, colours, specifications described in
this brochure are still valid at the time of placing
an order.

Our distributors have extensive product knowledge
and will be pleased to offer assistance in the
selection of your trailer.

© Ifor Williams Trailers Ltd 2022. All rights reserved.

No part of this publication may be reproduced in
any form or by any means, without the prior written
permission of Ifor Williams Trailers Ltd.

Throughout this brochure the lashing of plant
equipment is shown for illustration purposes only.
Always consult plant machinery manufacturer for
correct lashing points.

We would like to thank the following organisations
who assisted the production of this brochure;
Flockton Hall Logs (Wakefield), Grace Landscapes
(Mirfield), Kirkby Building Supplies (Boston Spa),
Ripon Farm Services, Temple Quarry (Grange Moor).

Trailer Model	Maximum Gross Weight	Tyre Size	Unladen Weight	Overall Length (mm)	Overall Width (mm)	Bed Height (mm)	Internal Length (mm)	Internal Width (mm)	Overall Height to Headboard (mm)	Overall Height to Tailboard (mm)
TT2515M	2700kg	165R13C	700kg	3810	1590	740	2460	1490	1150	1170
TT2515	2700kg	165R13C	730kg	3810	1590	740	2460	1490	1150	1170
TT2515	2700kg	155/70R12C	730kg	3810	1590	710	2460	1490	1120	1150
TT3017	3500kg	195/60R12C	870kg	4370	1720	720	3010	1620	1130	1150
TT3017	3500kg	185/70R13C	880kg	4370	1720	740	3010	1620	1150	1180
TT3621	3500kg	195/60R12C	990kg	4960	2060	720	3620	1950	1130	1150
TT3621	3500kg	185/70R13C	1000kg	4960	2060	740	3620	1950	1150	1180

Tipper Pricing

	Tyres	Delivery Charge to UK Mainland Distributor	Trailer with Headboard, Dropsides and Tailboard	Plain Aluminium Flooring	Removable Ladder Rack	Weldmesh Panelled Side Extensions	Solid Side Extensions Kit	12v/24v LED Lights	Prop Stands (Pair)	Skid Carrier	Pair of 2.4m/8' Long Steel Skids	Pair of 2.4m/8' Long Aluminium Skids	Rear Lamp Guards	Optional Toolbox	Floor Mounted (‘U Bolt’ style) Lashing Points (Pair)	Electric Winch and Bracket	Coupling Head Security Lock	Trailer Aid
TT2515 (Manual)	165R13C	£98	£4,002	STD	£79	£610	£861	£244	£100	£266	£416	£488	£43	£116	£50	£753	£172	£86
TT2515 Power-Tip	165R13C	£98	£4,577	STD	£79	£610	£861	£244	£100	£266	£416	£488	£43	£116	£50	£753	£172	£86
TT2515 Power-Tip	155/70R12C	£98	£4,692	STD	£79	£610	£861	£244	£100	£266	£416	£488	£43	£116	£50	£753	£172	£86
TT3017 Power-Tip	195/60R12C	£98	£5,452	STD	£86	£796	£1,048	£244	£100	£280	£416	£488	£43	£116	£50	£753	£172	£86
TT3017 Power-Tip	185/70R13C	£98	£5,603	STD	£86	£796	£1,048	£244	£100	£280	£416	£488	£43	£116	£50	£753	£172	£86
TT3621 Power-Tip	195/60R12C	£98	£6,147	STD	£86	£853	£1,191	£244	£100	£280	£416	£488	£43	£116	£50	£753	£172	£86
TT3621 Power-Tip	185/70R13C	£98	£6,299	STD	£86	£853	£1,191	£244	£100	£280	£416	£488	£43	£116	£50	£753	£172	£86