




Bulldog MC100 Chain Lock



Ribbed Ground Anchor Tube.

Cut away section of installed anchor tube

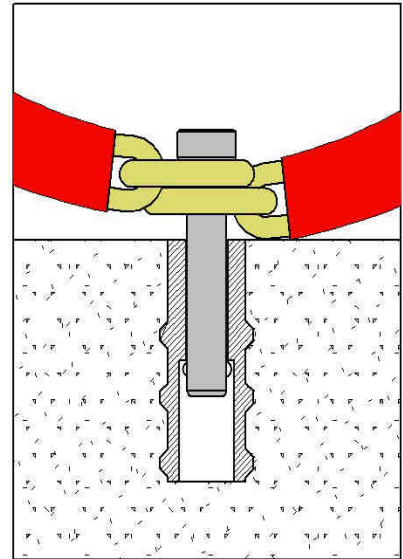

Features:-

1. 1.2m (4ft) high specification, *Boron alloy steel chain case hardened to 750-800 VPN (60 - 62 Rockwell) min depth 0.040 inch. Link diameter 13mm, end links 16mm diameter. (*This chain is not standard mild steel).
2. Ductile, hard core to chain 350 VPN, sufficient to support case hardening without being brittle. Resistant to cropping, can not be bolt cropped by hand.
3. Bright red woven fabric sleeving for high visibility and protection.
4. No padlock, uses Bulldog Super Lock Bolt with over one million possible key combinations (see separate information sheet).
5. Can be secured in two ways:
 - i) With recessed cup to fit onto Bulldog Super Lock Bolt for use as a portable secure loop.
 - ii) With the ribbed ground anchor tube supplied with kit which can be concreted in the ground/floor to offer a permanent anchor position within the garage, in the drive or workshop etc.
6. No protruding parts when ground anchor is not in use, tube is completely flush fitting.
7. Weight of chain = 8.2kg.
8. Sold Secure approved product.
9. Also available kit reference MC100S. A ground anchor kit as above but with 6ft chain instead of 4ft. 6ft has special pear link as well as standard end links giving facility to create a noose. Weight of chain = 11.1kg.



Special Pear Link End (6ft Chain only)

BULLDOG SECURITY PRODUCTS LIMITED
Units 1 - 4 Stretton Road, Much Wenlock, Shropshire, TF13 6DH.
Tel: 01952 728171 Fax: 01952 728117
Email: sales@bulldogsecure.com Web Site: www.bulldogsecure.com